



## **Processing Machine and Technical Information**

**Machine Specifications** – Graco E-20 Capacity up to 20lbs/min  
Graco Reactor 2 E-30 Capacity up to 30lbs/min  
Graco Reactor 2 H-40 Capacity up to 40lbs/min  
Graco Reactor 2 H-50 Capacity up to 50lbs/min  
PMC PH-40 Capacity up to 40 lbs/min

### **Typical Machine Settings**


Pre-heater Temperature – 110F min to 140F max  
Hose Heat – 0F min to 140F max  
Pressure – 900-1000 PSI

(Note: Pre-heater and Hose Heat parameters are subject to change based on application, ambient conditions and TerraThane system selection)

**Gun Specifications** – GX-7 Gun Package Part no. 295542

No PCD retainer or air cap required  
Packer O-ring (1.5mm x 7mm Buna matl.)  
16160-125-A2-Pkg (1 module, 2 drill bits)  
16160-125-A2-Doz (12 modules, 2 drill bits)

**Packer Information** – Part number QC1-C (100 count box quantities)  
**Packer Clamp** – Part number QC1-C Clamp

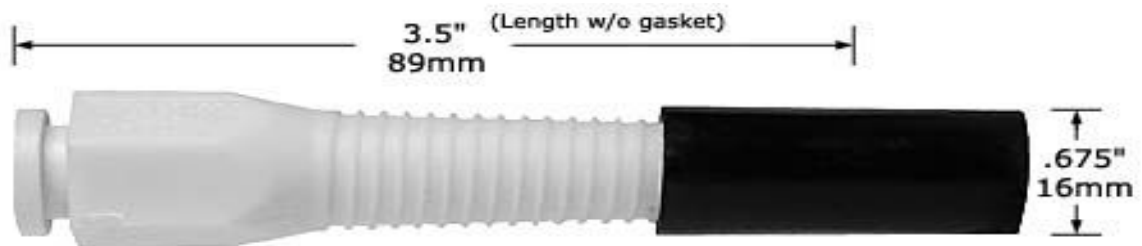

NCFI POLYURETHANES 800.346.8229

[www.terrathane.com](http://www.terrathane.com)

